ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMA). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
STREET ADDRESS (Including Ap		COMPANY NAIC NUMBER			
OTHER DESCRIPTION (Lot and I					
Lot 116 Cross	Creek subdiv	vision Pl	nase 1-A		
CITY				STATE	ZIP CODE
Pooler	SECTION R FI	OOD INSURA	NCE RATE MAP (FIRM)	GA INFORMATION	31322
Provide the following from the			The part of the part	THE CHARACTERS	
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
13030	0C75	С	Sept. 20, 1995 May 19, 1987	AE	(in AO Zones, use depth)
	no BFE is provided o	n the FIRM, an		blished a BFE fi	Other (describe on back) or this building site, indicate
- A - Andrews - A - A - A - A - A - A - A - A - A -	SECTIO	MC BUILDE	NG ELEVATION INFORM	ATION	
of 115.7 fee (b). FIRM Zones V1-V30, V the selected diagram, i (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fi one) the highest grade level) elevated in accord. Indicate the elevation datu	t NGVD (or other FIR /E, and V (with BFE). It is at an elevation of LBFE). The floor used the highest grade adoor used as the refer adjacent to the buildidance with the commum system used in dea 2). (NOTE: If the elevation of Page 2.)	M datum—see The bottom of As the reference level from The bottom of As the reference level from The second lev	Section B, Item 7), if the lowest horizontal strict heet NGVD (or other FIRI nee level from the selected uilding, in the selected diagram is depth number is available ain management ordinance above reference level element of the datum system uses to the datum system uses	uctural member I datum—see Se I diagram is feet al I, is the building I Yes rations: X NGV evations is differed on the FIRM	cction B, Item 7). J. L feet above C or over C or below (check is lowest floor (reference No Unknown D '29 Other (describe ment than that used on
5. The reference level eleva	tion is based on: 🔀 ion drawings is only v ly be valid for the buil	actual constru alid if the build	ction oonstruction dra	wings reference level :	
i. The elevation of the lowes Section B, Item 7).	it grade immediately :	adjacent to the	building is: 15.	[1] feet NGVD (or other FIRM datum-see
	SE	CTION D CO	MMUNITY INFORMATIO	N	
i. If the community official re is not the "lowest floor" as floor" as defined by the or 2. Date of the start of constru	defined in the comm	unity's floodpla	in management ordinance	, the elevation o	of the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-II the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME		LICENSE NUMBER (or ARIE Sea		
Michael A. Hussey		2509	3()	
TITLE	COMPANY NAI			
Land Surveyor	Freeman & Vaughn			
SKINATURE A C A	Savannah,	Georgi	STATE 31416	ZIP
The state of	Design	10/16/97	PHONE (912) 355-9603	
Copies should be made of this Certific	ate for: 1 community officia	(, 2) insurance agent/com	pany, and 3) building own	Эг.
COMMENTS: Section C, 1	- certification i	s for type of	construction	
only.				

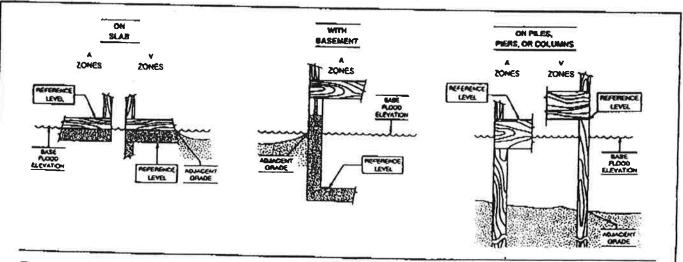

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.


 \mathcal{C}_{i}


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

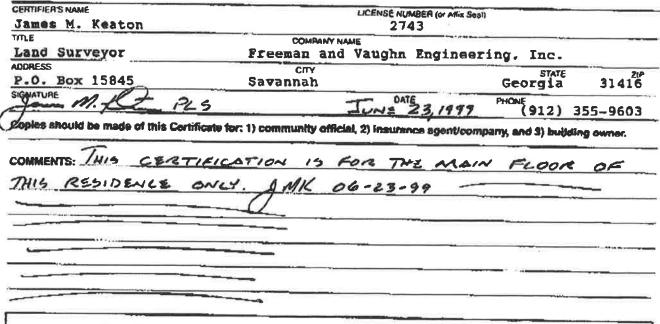

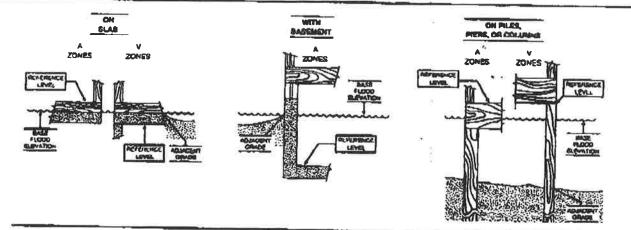

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.