ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

* *************************************		FOR INSURANCE COMPANY USE						
BUILDING OWNER'S NAME					POLICY NUMBER			
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg, Number) OR P.O. ROUTE AND BOX NUMBER #131 CROSS CREEK DRIVE					COMPANY NAIC NUMBER			
OTHER DESCRIPTION (Lot and	Block Numbers, e(c.) 2069 CRES	K SUBI	DIVISION					
POOLSE			_	STATE EOMOLA	ZIP CODE 3/322			
70000	SECTION B F	LOOD INSURA	NCE RATE MAP (FIRM)		31722			
Provide the following from t	he proper FIRM (See	Instructions);			****			
1, COMMUNITY NUMBER	2 PANEL NUMBER	3 SUFFIX	UFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE		6. BASE FLOOD ELEVATION			
130261	0075	C	SEPT. 20,1995	AE	(in AO Zones, use depth)			
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: Feet NGVD (or other FIRM datum—see Section B, Item 7).								
	SECTION	ON C BUILDI	NG ELEVATION INFORM	NATION				
of	it NGVD (or other FIF VE, and V (with BFE) is at an elevation of L BFE). The floor used the highest grade ac floor used as the refer adjacent to the build redance with the comm um system used in die 2). (NOTE: If the e 3, Item 7), then conve	The bottom of th	Section 8, Item 7). of the lowest horizontal structure in the selected diagram is depth number is available ain management ordinance above reference level elected in measuring the elected in the selected diagram is depth number is available ain management ordinance above reference level elected in measuring the elected in measuring the elected in the selected in measuring the elected in measu	ructural member of M datum—see Sed diagram is in the feet at the control of the c	ction B, Item 7). I feet above or cove or below (check is lowest floor (reference) No O Unknown D '29 Other (describe) Than that used on			
equation under Comment 4. Elevation reference mark		RM; 🗌 Yes 🎘	No (See Instructions or	n Page 4)				
5. The reference level elevation is based on: A actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)								
6. The elevation of the lower Section B, Item 7).	st grade immedialely	adjacent to the	e building is:	feet NGVD (or other FIRM datum-see			
	SE	CTION D CO	MMUNITY INFORMATIO	N	A. 1. 1811 - A. 1811 - A. 1. 1811 - A. 1. 1811 - A. 1. 1811 - A. 1. 1811 - A. 18			
I. If the community official re is not the "lowest floor" as floor" as defined by the or 2. Date of the start of constr	defined in the communication is:	nunity's floodpla	tin management ordinand	e, the elevation of	of the building's "lowest			


	*		

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE).V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001,

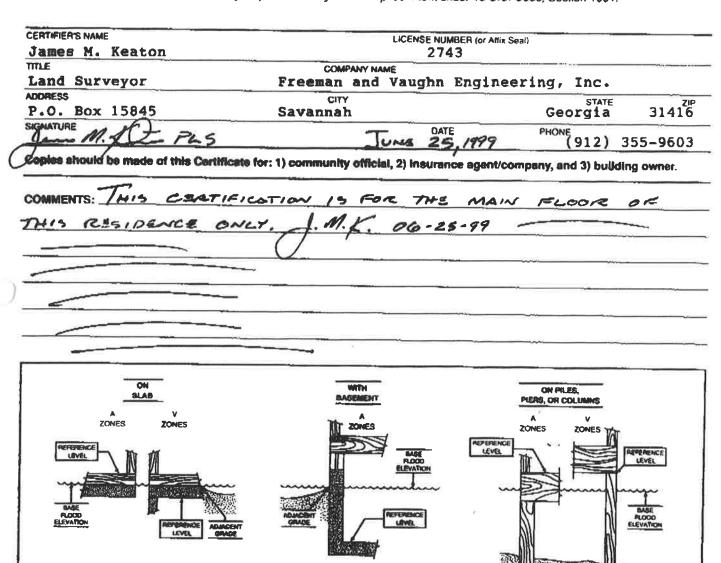

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.