ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

STREET ADDRESS (Including Apr., Unit, Suite anidor Blog, Number) OR P.O. ROUTE AND BOX NUMBER 132 Cross Creek Drive OTHER DESCRIPTION (Lot and Block Numbers, etc.) Lot 128 Cross Creek Subdivision, Phase IB CITY STATE STATE CIP CODE POOLER SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Provide the following from the proper FIRM (See Instructions):				the state of the s		
TREE FADDRESS (Including Ap. Livil, Suice and/or Bog, Number) OR P.O. ROUTE AND BOX NUMBER 132 Cross Creek Drive THE RESCRIPTION (or and Slock Numbers, ac) Lot 128 Cross Creek Subdivision, Phase IB STATE ZP COOK POOLER SECTION B FLOOD INSURANCE RATE MAP (RIRM) INFORMATION Provide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. FANCE, MUMBER 2. FANCE, MUMBER 1. 30.261 0.075 C 2.0, 1.995 I. Indicate the elevation datum system used on the FIRM and the community has established a BRE for this building site, indicate the community's BFE: LILILITY (see Instructions): 1. End Zones A or V, where no BRE is provided on the FIRM and the community has established a BRE for this building site, indicate the community's BFE: LILILITY (see Instructions): SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject buildings reference level 1. 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of LILILITY (see Instructions): (c). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram, is at an elevation of LILILITY (see Instructions): (d). FIRM Zones A (without BFE). The Incorused as the reference level from the selected diagram is LILILITY (see a slove): (d). FIRM Zone A.O. The floor used as the reference level from the selected diagram is LILILITY (see a slove): (e). FIRM Zone A.O. The floor used as the reference level from the selected diagram is LILILITY (see a slove): (e). FIRM Zone A.O. The floor used as the reference level from the selected diagram is LILILITY (see a slove): (e). FIRM Zone A.O. The floor used as the reference level from the selected diagram is LILILITY (see a slove): (e). FIRM Zone A.O. The floor used as the reference level from the selected diagram is LILILITY (see a slove): (e). FIRM Zone		SECTION A PRO	PERTY INFO	HOTTAMP		FOR INSURANCE COMPANY USE
THE DESCRIPTION (It are all Buck Numbers, act) THE DESCRIPTION (It are all Buck Numbers, act) DOT 128 Cross Creek Subdivision, Phase IB STATE 2P CODE TO 31322 SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Towide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. FAMEL MANUER 3. SUFFIX ODE FIRM DOES 3. FIRM ZONE 6. BASE FLOOD BESIATOR 1. 130261 00.75 S SEPTEMBER 7. ADE OF FIRM DOES 3. FIRM ZONE 6. BASE FLOOD BESIATOR 1. SOMMUNITY NUMBER 1. FAMEL MANUER 3. SUFFIX ODE FIRM DOES 3. FIRM ZONE 6. BASE FLOOD BESIATOR 1. COMMUNITY NUMBER 1. FAMEL MANUER 3. SUFFIX ODE FIRM DOES 3. FIRM ZONE 6. BASE FLOOD BESIATOR 1. COMMUNITY NUMBER 1. FAMEL MANUER 3. SUFFIX ODE FIRM DOES 3. FIRM ZONE 6. BASE FLOOD BESIATOR 1. COMMUNITY NUMBER 1. FAMEL MANUER 3. SUFFIX ODE FIRM DOES 3. FIRM ZONE 5. PRIME ZONE 6. BASE FLOOD BESIATOR 1. Indicate the elevation datum system used on the FIRM for Base Flood Beveations (BFE): \$\overline{Limited}\$ DOT FIRM DOES 5. FIRM ZONE 5. PRIME ZONE 6. BASE FLOOD BESIATOR FOR ZONES A CT V, where no BFE is provided on the FIRM of the Base Flood Beveation (BFE). \$\overline{Limited}\$ DOT FIRM DOES 6. BEFT TO THIS BUILDING BESIATOR (BFE). THE FIRM DOES 6. BEFT TO THIS BUILDING BESIATOR (BFE). THE FIRM DOES 1. FIRM ZONE ALLAZO, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of LILLING BEFT. The floor used as the reference level from the selected diagram is \$\overline{Limited}\$ DOES 6. FIRM ZONE A (with DEFT). The floor used as the reference level from the selected diagram is \$\overline{Limited}\$ DOES 6. FIRM ZONE A (with DEFT). The floor used as the reference level from the selected diagram is \$\overline{Limited}\$ DOES 6. FIRM ZONE A (with DEFT). The floor used as the reference level from the selected diagram is \$\overline{Limited}\$ DOES 6. FIRM ZONE A (with DEFT). The floor used as the reference level from the selected diagram is \$\overline{Limited}\$ DOES 6. FIRM ZONE A (with DEFT). The floor used as t	HALDING OWNERS NAME	20 3				POLICY NUMBER
Lot 128 Cross Creek Subdivision , Phase IB STATE STATE 31322 SECTION B FLOOD INSURANCE RATE MAP (RRIM) INFORMATION SECTION B FLOOD INSURANCE RATE MAP (RRIM) INFORMATION 130261 0075 C September AE NATE 1200 Concentration of September 120 Concentration datum system used on the FIRM for Base Rood Bevations (BFE): XINGVO 29 C Or AZ Zanes, we depend 130261 0075 C September AE INCOMENTATION Indicate the elevation datum system used on the FIRM for Base Rood Elevations (BFE): XINGVO 29 C Or (AZ Zanes, we depend 130261 C Or (A	The State of the Control of the Cont	•	lumber) OR P.O. R	ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER
POOLE F. SECTION B. FLOOD INSURANCE RATE MAP (RIRM) INFORMATION SECTION B. FLOOD INSURANCE RATE MAP (RIRM) INFORMATION 1. COMMUNITY MUMBER 2. PARCL MUMBER 1. SUFFIX 5. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (AND ZONE) 1. DATE OF PRIM SPOKE 5. TRIM ZONE 6. BASE FLOOD SELEVATION (BPC) 1. DATE OF THIS DATE OF				lhasa ID		
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION 1.COMMUNITY NAMBER 2.FMEL NUMBER 3.SMFTX 4.DATE OF FIRM SDEX 5. FIRM ZONE 6. BASE FLOOD BLOWTON 130261 10075 C 20, 1,995 AE 12.0 1.Indicate the elevation datum system used on the FIRM for Base Flood Blevations (BFE): [X]NGVD 29 Other (describe on be. For Zones A or V, where no BFE is provided on the FIRM for Base Flood Blevations (BFE): [X]NGVD 29 Other (describe on be. For Zones A or V, where no BFE is provided on the FIRM datum-see Section B, Item 7). SECTION C BUILDING ELEVATION (INFORMATION Liding the Blevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject buildings reference level		Creek Subdiv	ision, F	ugae IR	STATE	ZIP COOF
To community murses 2, FMCL MUNISER 3, SUFFIX 3, DATE OF FMM NOEX 5, FMM ZONE 6, BASE FLOOD ELEVATION 130261 0075 C 20, 1995 AE 12.00		· · · · · · · · · · · · · · · · · · ·				
1. COMMUNITY NUMBER 2. FAMEL MANUER 1. SUFFIX 5. Ept ember 2. 0, 1995 AE 1.2.0 Indicate the elevation datum system used on the FIRM for Base Rood Bevations (BFE): \(\begin{align*}{ c c c c c c c c c c c c c c c c c c c	••	SECTION B FL	ARUSMI DOO.	NCE RATE MAP (FIRM)	INFORMATION	
130261 0075 C September AE (**A0 Zones, une sept*) 12.0 Indicate the elevation datum system used on the FIRM for Base Rood Bevations (BFE): ☒ NGVD 29 ☐ Other (describe on be. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: ☐ ☐ ☐ feet NGVD (or other FIRM datunt—see Section 8, Item 7). SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level ☐ ☐. (B) FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	rovide the following from t	tie proper FIRM (See	Instructions):			
130261 0075 C 20, 1995 AE 12.0 Indicate the elevation datum system used on the FIRM for Base Flood Bevations (BFE): ⊠NGVD 29 ☐ Other (describe on bal. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	1. COMMUNITY NUMBER	2. FAMEL NUMBER	3. SUFFIX	4, DATE OF FIRM MOEX	5. FIRM ZONE	6. BASE PLOOD ELEVATION
For Zones A or V, where no BFE is provided on the FIFIM, and the community has established a BFE for this building site, indicate the community's BFE:	130261	0075	С		AE	
Lising the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 1. (a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 116 . 0 feet NGVD (or other FIRM datum-see Section B, ftem 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of 111	. For Zones A or V, where	no BFE is provided o	n the FIRM, an	nd the community has est	ablished a BFE f	or this building site, indicate
(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of \(\leftarrow \frac{116}{19} \rightarrow \frac{10}{19} \) feet NGVD (or other FIRM datum—see Section B, ftem 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of \(\leftarrow \frac{11}{19} \rightarrow \frac{1}{19} \) feet NGVD (or other FIRM datum—see Section B, ftem 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is \(\leftarrow \leftarrow \frac{1}{19} \) feet above \(\leftarrow \frac{1}{19} \) or below \(\leftarrow \frac{1}{19} \) (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is \(\leftarrow \leftarrow \frac{1}{19} \) feet above \(\leftarrow \frac{1}{19} \) or below \(\leftarrow \frac{1}{19} \) (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? \(\leftarrow \frac{1}{19} \) No \(\leftarrow \frac{1}{19} \) Unknown I indicate the elevation datum system used in determining the above reference level elevations: \(\leftarrow \frac{1}{19} \) No(VD 29 \(\leftarrow \frac{1}{19} \) Other (describe under Comments on Page 2). (NOTE: If the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) It is elevation reference mark used appears on FIRM: \(\leftarrow \frac{1}{19} \) No (See Instructions on Page 4) It is reference level elevation is based on: \(\text{X} \) accual construction \(\leftarrow \frac{1}{19} \) certain of the lowest floor in place, in which ease this certificate will only be valid for the building during the course of construction. A post-construction Bevation Certificat		SECTION	ON C BUILDI	NG ELEVATION INFORM	AATION	
i. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) The elevation of the lowest grade immediately adjacent to the building is:	the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grad- level) elevated in according to the elevation da under Comments on Pathe FIRM (see Section equation under Commen	is at an elevation of Lt BFE). The floor used the highest grade action used as the reference adjacent to the build ordance with the commutation system used in dige 2). (NOTE: If the B. Item 7], then convents on Page 2.)	d as the referentiacent to the barence level from ing. If no flood numiny's floodpletermining the elevation daturent the elevation	leet NGVD (or other FIF noe level from the selecte wilding. In the selected diagram is depth number is availablain management ordinant above reference level elem used in measuring the ons to the datum system united.	IM datum—see So d diagram is L. feet a le, is the building ce? Yes . evations: X NGN elevations is differed on the FIRM	ection B, Item 7).
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) i. The elevation of the lowest grade immediately adjacent to the building is: 115.13 feet NGVD (or other FIRM datum-see Section B, Item 7). SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: 111.11.11 feet NGVD (or other FIRM datum-see Section B, Item 7).	. Elevation reference man	k used appears on Fil	RM: 🗌 Yes 🗓	No (See Instructions o	n Page 4)	
Section B, Item 7). SECTION D COMMUNITY INFORMATION I. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the Towest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:	(NOTE: Use of constructions this certificate will be	ction drawings is only only be valid for the bu	valid if the build ilding during th	ding does not yet have th	e reference level	floor in place, in which tion Elevation Certificate
I. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:		est grade immediately	adjacent to the	e building is: 115	1.131 feet NGVD	(or other FIRM datum-see
is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:		Si	ECTION D C	DMMUNITY INFORMATION	DN	
[MC	is not the "lowest floor" a floor" as defined by the	es defined in the commondinance is:	nunity's floodpl	lain management ordinan NGVD (or other FIRM dat	ce, the elevation um-see Section	of the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)				
James M. Keaton	GA 2743				
TITLE	COMPANY NAME				
Land Surveyor	Freeman and Vaughn	Engineering, Inc.			
ADDHESS	CITY	STATE ZIP			
308 Commercial Drive	Savannah	Georgia 31406			
SIGNATURE M. Kell PL	5 Dec 01,1918	PHONE (912) 355-9603			
COMMENTS:					

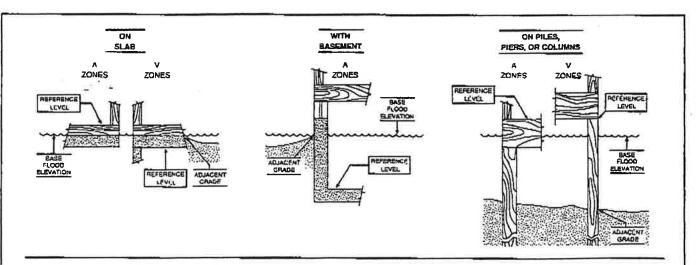

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.