The serve of the serve

ELEVATION CERTIFICATE

O.M.B. No 3067-0077

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL PLOOD INSURANCE PROGRAM

TENTION: Use of this certificate does not provide a walver of the flood insurance purchase requirement. This form is used only to ovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to attermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

		FOR INSURANCE COMPANY USE			
BUILDING OWNERS NAME		POLICY NUMBER			
TREET ADDRESS (Including Ap		COMPANY NAID NUMBER			
THER DESCRIPTION (Let and E	Social Numbers, etc.)	hase	10 Gerade	n Acre	s Estates
Pooler	The same of the sa			G-Q STATE	31325
	SECTION B FL	AUSNI DOC.	ance rate Map (FIRM)	INFORMATION	
rovida the following from t	ne proper FIRM (See	Instructions):			
I. COMMUNITY NUMBER	2. PANEL NUMBER	3. OUPFIX	4. DATE OF FIRM INDEX	S. FIRM ZONE	8. SASE FLOOD SLEVATION OR AO Zones, use depth
130030	75	C	May 19, 1987	AE	14.0
. For Zones A or V, where	no BFE is provided o	n the FIRM, a		ablished a BFE f	Other (describe on back) or this building site, indicate
	SECTION	DNC BUILD	ING ELEVATION INFORM	AATION	
of 1153.19 fee (b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grade level) elevated in acco indicate the elevation de under Comments on Per the FIRM [see Section equation under Comment Elevation reterence man The reterence level elev (NOTE: Use of construct	AE, AH, and A (with I of NGVD (or other FIF VE, and V (with BFE) is at an elevation of L BFE). The floor use it the highest grade at floor used as the refer adjacent to the bulk ordance with the committum system used in case 2). (NOTE: If the B, Item 7], then converte on Page 2.) It is used appears on Figure 1 is based on: I still on the based on:	The top the to	e Section B, Item 7). of the lowest horizontal at the lowest horizontal at the lowest horizontal at the selected building. om the selected diagram is at depth number is available plain management ordinar above reference level elem used in measuring the lons to the datum system used.	ructural member RM datum-zee 8 ad diagram is in fact a lie, is the building ace? Yes seations: In NG elevations is difference in Page 4) in Page 4)	teet above ar above or below (check fe lowest floor (reference No Unknown VO '28 Other (describe erent than that used on I and show the conversion If floor in place, in which
The elevation of the lower Section B, Item 7).	est grade immediatel;	adjacent to t	he building in:	J.LLI teet NGVD	(or other FIRM datum-see
		ECTION D	COMMUNITY INFORMATI	ON	
is not the "lowest floor" a	as defined in the com ordinance is:	munity's flood	pigin management ordinar NGVD (or other FIRM da	rce, the elevation	ndicated in Section C, Item 1 of the building's Towest B, Item 7).
FEMA Form \$1-31, MAY 50		REPLA	CES ALL PREVIOUS EDITIONS	ŞE	E REVERSE SIDE FOR CONTINUATIO

PACE 6/7

815 535 5850

MAT. 21 . 99 (FRI) 11:48 EMC ENCINEERING IN


SECTION E CERTIFICATION

his certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breaksway/non-breaksway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Commenta below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CESTIFIERS NAME	LIDENSE NIMBERS AND 2486						
Terry M. Coleman	EMC Engineering Services, Inc.						
TILE Land Surveyor	Savannah		STATEA	3140			
ADDRAG Bast Chariton Street	5/27/59		232-6533.				
Copies abould be made of this Certificate for:	1) community official, 2) insurance agent/co	mpany, and	3) building own	př.			
Copies abould be made of this Certificate for	T) Commonly						
ACMINENTO.							
COMMENTS:							
	WITM	PIERS, OR	COLUMNS				

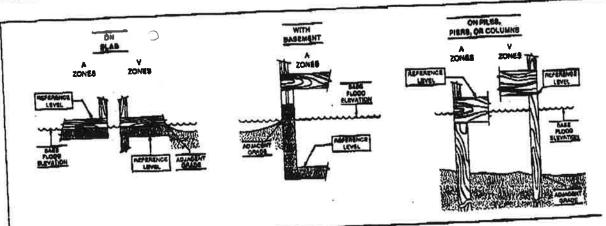

The diagrams above litustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

Page 2

PAGE 7/7

615 585 5850

MAY. 21 ' 99 (FRI) 11:49 EMC ENCINEERING IN