O.M.B. No 3067-0077 Expires May 31, 1993

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

evation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.


	SECTION A PRO	OPERTY INFO	RMATION		FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME					POLICY NUMBER	
STREET ADDRESS (Including Ap			HOMES ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER	
		CRES E	states, Pho	se 10	*	
OTHER DESCRIPTION (Lot and I	Block Numbers, etc.) Of 3 (2	Ag	anden Acid	es Est	Lates, Phase,	
CITY POOLER	3	G	-a	STATE G Q	zip code 3/322	
	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION		
rovide the following from t	he proper FIRM (See	Instructions):		1116	t - Wated tra	
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
130030	75	C	5-19-87	AE	14. 0° ·	
. For Zones A or V, where	no BFE is provided of	n the FIRM, ar	ase Flood Elevations (BFI nd the community has est FIRM datum-see Sectio	ablished a BFE f	Other (describe on back) or this building site, indicate	
	SECTI	ON C BUILDI	ING ELEVATION INFOR	MATION		
(c). FIRM Zone A (without below (check one)  (d). FIRM Zone AO. The one) the highest grade level) elevated in account and account to the comments on Page 19 (without page 2).	t BFE). The floor use the highest grade a floor used as the refe e adjacent to the build ordance with the com atum system used in a ge 2). (NOTE: If the B, Item 7], then convents on Page 2.)	d as the refere djacent to the terence level fro ding. If no flood munity's flood determining the elevation datuent the elevation	ouilding.  m the selected diagram is d depth number is availab plain management ordinar e above reference level el m used in measuring the post to the datum system of	d diagram is let a le, is the building ace? Yes levations: I NG elevations is different on the FIRM	L. feet above or  above or below (check J's lowest floor (reference No Unknown VD '29 Other (describe	
case this certificate will o will be required once cor	ction drawings is only only be valid for the bu astruction is complete	valid if the bui uilding during to .)	ilding does not yet have the course of construction.	e reference leve A post-construc	ction Elevation Certificate	
Section B, Item 7).	est grade immediatel	y adjacent to th	ne bullaing is:	ieet NGVL	) (or other FIRM datum-see	
·	9	ECTION D C	OMMUNITY INFORMAT	ON		
community official of the "lowest floor" as defined by the 2. Date of the start of cons	as defined in the comordinance is:	munity's floodp	olain management ordina NGVD (or other FIRM da	nce, the elevation		

## SECTION E CERTIFICATION

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Terry M. Coleman	GA R.L.S. No. 2486					
Land Surveyor	EMC Engineering Services, Inc.					
ADDRESS East Charlton Street	Såvannah	STATEA	31401			
SIGNAPOREM	1/1819	<b>(912)</b> 232-6533	•			
Copies should be made of this Certificate for:	1) community official, 2) Insurance agent	company, and 3) building own	ner.			
COMMENTS:						
			(S)			

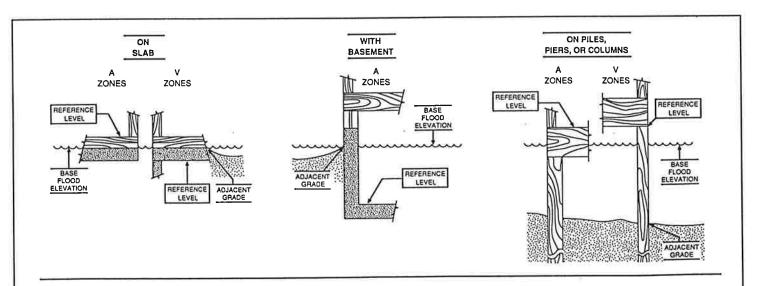

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.