ELEVATION CERTIFICATE

PEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

TTENTION: Use of this certificate does not provide a walver of the flood insurance purchase requirement. This form is used only to rovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to etermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR), instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					for incurance ochipany use
WILDING OWNER'S NAME	heen Fa	milu	Homes		POLICY NUMBER
TREET ADDRESS (Including Ac			<i>A</i>		COMPANY NAIC NUMBER
THER DESCRIPTION (Lot and E	Slock Numbers, etc.)		4cres Way		
LOT 30		se 10	Ganden	tores &	Estates
Poole	R		69	STATE	3/322
	SECTION B FL	RUBNI DOO	NCE RATE MAP (FIRM)	INFORMATION	
ovide the following from ti	ne proper FIRM (See	instructions);			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	8. PIRM ZONE	6. BASE FLOOD SLEVATION (in AO Zenes, use depth)
130000	75		5-19-1987	KE,	14.0.
For Zones A or V, where the community's BFE: L	no BFE is provided or	n the FIRM, a GVD (or other	nd the community has eater FIRM datum—see Section	B, Item 7),	Other (describe on back) or this building site, indicate
	SECTIO	DNC BUILD	ING ELEVATION INFORM	ATION	
of L L is is feet. (b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) the highest grade level) elevated in accounter Comments on Paythe FIRM [see Section equation under Comment. Elevation reference man. The reference level elevated in accounter the comments of Paythe FIRM [see Section equation under Comment.	et NGVD (or other FIR VE, and V (with SFE). Is at an elevation of L SFE). The floor used the highest grade addition as adjacent to the build ordance with the committum system used in dige 2). (NOTE: If the dige 2), (NOTE: If the one on the on Page 2.) k used appears on FIF ation is based on:	M datum-see. The bottom I as the refere biacent to the trence level fro ling. If no floor munity's floodp etermining the elevation datu and the elevation AM: Yes Actual constr	Section S, item 7). of the lowest horizontal struction of the lowest horizontal struction. If feet NGVD (or other FIR time level from the selected cuilding. If the selected diagram is a depth number is available that management ordinant a above reference level elem used in measuring the consto the datum system used No (See instructions of	uctural member M datum-see \$i d diagram is if feet a e, is the building ee? Yes vations: NG' elevations is diffe sed on the FIRM in Page 4) rewings	bave or below (check 's lement floor (reference No Unknown /D '29 Other (describe rent than that used on and show the conversion
case this certificate will o will be required once con . The elevation of the low	only be valid for the bunstruction is complete.	liding durin g ti)	he course of construction.	A post-construc	tion Elevation Certificate (or other FIRM datum-see
Section B, Item 7).				<u> </u>	1
	8	ECTION D C	OMMUNITY INFORMATI	DN	
Is not the "lowest floor" a	as defined in the commordinance is:	nunity's flood;	olain m anagem ent ordin an NGVD (or other FIRM dat	ce, the elevation	ndicated in Section C, Item 1 of the building's "lowest B, Item 7).
FEMA Form 81-81, MAY 90		REPLAC	CES ALL PREVIOUS EDITIONS	DEI	REVERSE SIDE FOR CONTINUAL


BECTION & CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AC and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 6 - Distinguishing Features—if the certifier is unable to certify to breakaway/non-breaksway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section 0, Item 1, must still be entered.

i certify that the information in Sections B and C on this certificate represents my bast afforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Terry M. Coleman	CEMICY EMgineering Services, Inc.				
Land Surveyor					
ADDRESS East Chariten Street	Savannah STATGA 3	140			
SIGNATURE ON	512(69 (912) 232-6533.				
Copies should be made of this Certificate for	; 1) community official, 2) insurance agent/company, and 3) building owner.	727244			
COMMENTS:					
0					
	WITH GM PILES,	- 1			

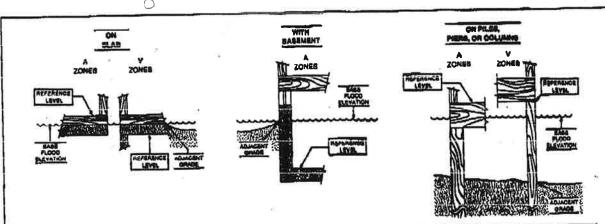

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.