ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

	FOR INSURANCE COMPANY USE					
BUILDING OWNER'S NAME					POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR RO, ROUTE AND BOX NUMBER #6 Cross Creek Court					COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lat and I		Dhace				
Lot 136 Cross	Creek Drive,	Pnase .	I.B.	45-55		
Pooler	- 6			STATE GA	ZIP CODE 31322	
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)			
Provide the following from the	ne proper FIRM (See	Instructions):				
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	S FIRM ZONE	6. BASE FLOOD ELEVATION	
130261	0075	С	September 20, 1995	AE	(in AO Zones, use depth)	
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: LILLIB feet NGVD (or other FIRM datum-see Section B, Item 7).						
SECTION C BUILDING ELEVATION INFORMATION						
of	t NGVD (or other FIR VE, and V (with BFE), is at an elevation of L. BFE). The floor used the highest grade ad loor used as the refer adjacent to the building of the with the community of the etc. (NOTE: If the etc., flem 7), then converts on Page 2)	M datum-see: The bottom of the bottom of the reference level from the bottom of the bottom of the bottom of the control of the	Section B, Item 7). If the lowest horizontal state the lowest horizontal state the lowest horizontal state the lowest horizontal state level from the selected diagram is depth number is available an management ordinance to used in measuring the elected in the datum system uses to the datum system uses	ructural member of the datum—see Set diagram is 11 feet at e, is the building toe? 12 Yes 12 vations: 12 NGV levations is differed on the FIRIM.	ection 8, Item 7). L. L. I feet above C or pove C or below C (check to lowest floor (reference No C Unknown 70 '29 C Other (describe	
4. Elevation reference mark		M: 🗌 Yes 🎚	No (See Instructions or	n Page 4)		
5. The reference level eleval (NOTE: Use of construct case this certificate will on will be required once cons	tion is based on: X ion drawings is only v	actual construe	ction C construction de	awings	floor in place, in which ion Elevation Certificate	
S. The elevation of the lowest grade immediately edjacent to the building is: 1 1 18 6 feet NGVD (or other FIRM datum-see Section B, Item 7).						
	SE	CTION D CO	MMUNITY INFORMATIO	N		
1. If the community official m is not the Towest floor as floor as defined by the or 2. Date of the start of constr	dinance is:	unity's tloodpla	in management ordinanc GVD (or other FIRM date	e, the elevation of	of the buildings Warrant	


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-II the certifier is unable to certify to breakaway/non-breakaway wall enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by line or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME						
Michael A. Hussey	LICENSE NUMBER (or Affix Seal)					
TITLE	2509					
	COMPANY NAME					
Land Surveyor	Freeman & Vaughn	Engineering, Inc.				
P.Q. Box 15845	CITY		STATE ZIP			
SIGNATURE	Savannah,	Georgia	31416			
- Kindand A. P.	teres 10.	G-GTE PHON	E			
Coning should be and a second	0	9-90 (9)	(912) 355-9603			
Copies should be made of this Certification C, 1	certification is					
only.						
	• 0					
	(a)					
		Thursday, and the second				
	77 312					

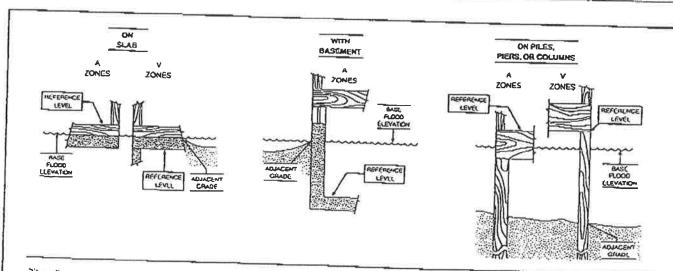

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.