# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

# ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner,

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Landmark 24 Homes	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 166 Champlain Drive	Company NAIC Number:
City: Pooler State: Georgia	ZIP Code: 31322
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Nur Lot 1013, Forest Lakes, Phase 10, 8th G.M. District, City of Pooler, Chatham Count	mber: ry, Georgia, PIN: 51014C11013
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.):	
A5. Latitude/Longitude: Lat. 32.147578 Long81.273461 Horizontal Datum: \[ \bigcap \]	IAD 1927 X NAD 1983 ☐ WGS 84
A6. Attach at least two and when possible four clear photographs (one for each side) of the building	
A7. Building Diagram Number: 1B	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): N/A sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	Yes No 🔀 N/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings: N/A Engineered flood openings: N/A	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c: $\frac{\mathrm{N/A}}{\mathrm{N}}$ sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instruction	ons): N/A sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): $\frac{N/A}{}$ sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 423 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	? ⊠ Yes ☐ No ☐ N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent Non-engineered flood openings: 0 Engineered flood openings: 3	acent grade:
d) Total net open area of non-engineered flood openings in A9.c: 0sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons): 600 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): 600 sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION
B1.a. NFIP Community Name: City of Pooler B1.b. NFIP Community Ide	ntification Number: 130261
B2. County Name: Chatham County B3. State: GA B4. Map/Panel No.:	
B6. FIRM Index Date: 08/16/2018 B7. FIRM Panel Effective/Revised Date: 08/16/	
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	Base Flood Depth): 20.0'
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:  [ FIS X FIRM Community Determined Other:	
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 \omega NAVD 1988 Other	/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Proto Designation Date:	ected Area (OPA)? Tyes X No
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box 166 Champlain Drive	No.:	FOR INSURANCE COMPANY USE			
City: Pooler State: Georgia ZIP Code: 31322	Policy Number:				
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)					
C1. Building elevations are based on:  Construction Drawings*  Building Under A new Elevation Certificate will be required when construction of the building is construction.		n* ⊠ Finished Construction			
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), A99. Complete Items C2.a–h below according to the Building Diagram specified in Benchmark Utilized: Local Vertical Datum: NA	tem A7. In Pι	R/AE, AR/A1-A30, AR/AH, AR/AO, uerto Rico only, enter meters.			
Indicate elevation datum used for the elevations in items a) through h) below.  NGVD 1929 X NAVD 1988 Other:					
Datum used for building elevations must be the same as that used for the BFE. Conversi If Yes, describe the source of the conversion factor in the Section D Comments area.	on factor use	ed? Yes No Check the measurement used:			
<ul> <li>a) Top of bottom floor (including basement, crawlspace, or enclosure floor):</li> </ul>	21.9	▼ feet  meters			
b) Top of the next higher floor (see Instructions):	32.4	🗶 feet 🗌 meters			
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A	feet meters			
d) Attached garage (top of slab):	20.3				
<ul> <li>e) Lowest elevation of Machinery and Equipment (M&amp;E) servicing the building (describe type of M&amp;E and location in Section D Comments area):</li> </ul>	21.8	▼ feet			
f) Lowest Adjacent Grade (LAG) next to building: Natural 🔀 Finished	19.9	🔀 feet 🗌 meters			
g) Highest Adjacent Grade (HAG) next to building: Natural 🔀 Finished	20.1	🔀 feet 🗌 meters			
<ul> <li>Finished LAG at lowest elevation of attached deck or stairs, including structural support:</li> </ul>	N/A	feet meters			
SECTION D - SURVEYOR, ENGINEER, OR ARCHITE	CT CERTIF	CATION			
This certification is to be signed and sealed by a land surveyor, engineer, or architect autinformation. I certify that the information on this Certificate represents my best efforts to it false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section	nterpret the d	ate law to certify elevation lata available. I understand that any			
Were latitude and longitude in Section A provided by a licensed land surveyor?	□ No				
▼ Check here if attachments and describe in the Comments area.					
Certifier's Name: Don E. Taylor License Number: 3417					
Title: Professional Land Surveyor					
Company Name: Coleman Company, Inc.					
Address: 1480 Chatham Parkway, Suite 100		003417			
City: Savannah State: GA ZIP Code: 3	1405	- 12			
Signature: Date: 02-		ARD TAY			
Telephone: 912-200-3041 Ext. Email: DTAYLOR@CCI-SAV.COM		Place Seal Helle			
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.					
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) bdilding owner.  Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments):  A3: Plat Book 53, Page 745.  A9: Garage vented by (3) engineered vents. Smart Vent Products, Inc. Model# 1540-510. See attached certification.  B9: A 1'(one foot) free board is required by the City of Pooler Flood Damage Prevention Ordinance.  C2: Benchmark utilized was established using "EGPS" GPS base station network. Elevations shown are referenced to NAVD 88 (12).  C2a: Elevation is top of finished floor for living space.  C2e: Lowest elevation of machinery servicing the building is the bottom of the HVAC compressor pad.					

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
166 Champlain Drive	Policy Number:
City: Pooler State: Georgia ZIP Code: 31322	Company NAIC Number:
SECTION E BUILDING MEASUREMENT INFORMATION (SURVEY FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT	NOT REQUIRED) BFE)
For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, use natural intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the meter meters.	grade, if available. If the Certificate is easurement used. In Puerto Rico only,
Building measurements are based on: Construction Drawings* Building Under Constructi *A new Elevation Certificate will be required when construction of the building is complete.	on*  Finished Construction
E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the measurement is above or below the natural HAG and the LAG.	appropriate boxes to show whether the
a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or below the HAG.
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or below the LAG.
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/onext higher floor (C2.b in applicable Building Diagram) of the building is:	
E3. Attached garage (top of slab) is:	above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is:	above or below the HAG.
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in a floodplain management ordinance?	accordance with the community's sust certify this information in Section G.
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESE	NTATIVE) CERTIFICATION
The property owner or owner's authorized representative who completes Sections A, B, and E for a sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	Zone A (without BFE) or Zone AO must
Check here if attachments and describe in the Comments area.	
Property Owner or Owner's Authorized Representative Name:	
Address:	
City: State:	ZIP Code:
Signature: Date:	
Telephone: Ext.: Email:	
Comments:	

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P	O. Route and Box No.:	FOR INSU	IRANCE COMPANY USE		
166 Champlain Drive			Policy Number:		
City: Pooler State: Georg ZIP Code: 31322			NAIC Number:		
SECTION G - COMMUNITY INFORMATION (RECOMM	ENDED FOR COMMUNI	TY OFFICIA	L COMPLETION)		
The local official who is authorized by law or ordinance to administer the Section A, B, C, E, G, or H of this Elevation Certificate. Complete the a	e community's floodplain ma pplicable item(s) and sign b	anagement or elow when:	dinance can complete		
G1. The information in Section C was taken from other docume engineer, or architect who is authorized by state law to cert elevation data in the Comments area below.)	ify elevation information. (In	dicate the sou	irce and date of the		
G2.a. A local official completed Section E for a building located in E5 is completed for a building located in Zone AO.	Zone A (without a BFE), Zo	ne AO, or Zo	ne AR/AO, or when item		
G2.b.   A local official completed Section H for insurance purposes					
G3. In the Comments area of Section G, the local official descri	bes specific corrections to the	ne information	in Sections A, B, E and H.		
G4.  The following information (Items G5–G11) is provided for c	ommunity floodplain manage	ement purpos	es.		
G5. Permit Number: G6. Date Perm	nit Issued:				
G7. Date Certificate of Compliance/Occupancy Issued:					
G8. This permit has been issued for: 🗵 New Construction 🗌 S	ubstantial Improvement				
G9.a. Elevation of as-built lowest floor (including basement) of the building:	feet	meters	Datum:		
G9.b. Elevation of bottom of as-built lowest horizontal structural member:		meters	Datum:		
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet	meters	Datum:		
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	☐ feet	meters	Datum:		
G11. Variance issued? ☐ Yes 🔀 No If yes, attach document	ation and describe in the Co	mments area			
The local official who provides information in Section G must sign here correct to the best of my knowledge. If applicable, I have also provided	. I have completed the infor	nation in Sec	tion G and certify that it is		
Local Official's Name: Nicole Dixon, AICP, CFM	Title: Tirch	Λ.	The same of the sa		
NFIP Community Name: Ciby & Portler	— Oliveria	U	0		
Telephone: 912-748- 7361 Ext.: 366 Email: Naixon@ pooler-ga.gov					
Address: 100 Sw the 80					
City: Popler	State: <u>6</u>	ZIP C	ode: 3/322		
Signature: Date: 2 23 24					
Comments (including type of equipment and location, per C2.e; descriptions A, B, D, E, or H):	otion of any attachments; an	d corrections	to specific information in		

166 Champlain Drive	ot., Unit, Suite,	and/or Bidg. No.) or F	P.O. Route and Box N		Policy Number:	
City: Pooler		State: Georgia	ZIP Code: 31322		Company NAIC Number:	
		'S FIRST FLOOR REQUIRED) (FOR				
The property owner, owner's author to determine the building's first floor nearest tenth of a foot (nearest tenti Instructions) and the appropriate	height for ins h of a meter ir	urance purposes, Se n Puerto Rico). <i>Refei</i>	ections A, B, and I m rence the Foundati	ust also be on Type Dia	completed. Enter heights agrams (at the end of S	to the
H1. Provide the height of the top of	the floor (as i	indicated in Foundati	on Type Diagrams)	above the L	owest Adjacent Grade (L	AG):
<ul> <li>a) For Building Diagrams 1A floor (include above-grade floor subgrade crawlspaces or enclo</li> </ul>	s only for build	dings with		feet 🗌	meters   above the L	AG
<ul> <li>b) For Building Diagrams 2A higher floor (i.e., the floor above enclosure floor) is:</li> </ul>				feet	meters 🔲 above the L	AG
H2. Is all Machinery and Equipmen H2 arrow (shown in the Founda	nt servicing the ation Type Dia	e building (as listed in Igrams at end of Sec	n Item H2 instruction tion H instructions) f	s) elevated or the appro	to or above the floor indic priate Building Dlagram?	cated by the
SECTION I - PROPER	TY OWNER	(OR OWNER'S A	UTHORIZED REF	PRESENTA	TIVE) CERTIFICATIO	N
The property owner or owner's auth A, B, and H are correct to the best of indicate in Item G2.b and sign Section	of my knowled	entative who completige. <b>Note</b> : If the local	tes Sections A, B, ar floodplain manager	nd H must s nent official	gn here. <i>The statements</i> completed Section H, the	in Sections ey should
Check here if attachments are p	rovided (includ	ding required photos	) and describe each	attachment	in the Comments area.	
			,			
Property Owner or Owner's Authoriz	zed Represent					
		tative Name:				
Property Owner or Owner's Authorize Address:  City:		tative Name:				
Address:		tative Name:		ate:	ZIP Code:	
Address:		tative Name:	St	ate:	ZIP Code:	
Address:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	
Address:  City:  Signature:  Telephone:		tative Name:	St	ate:	ZIP Code:	

## IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 **BUILDING PHOTOGRAPHS**

See Instructions for Item A6.

Buildi	ng Street Address (including /	Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route a	and Box No.:	FOR INSURANCE COMPANY USE
166	Champlain Drive			Policy Number:
City:	Pooler	State: Georgia ZIP Code:	31322	Company NAIC Number:
				Company trains items on

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption:

Front View

02-15-2024

Clear Photo One



Photo Two

Photo Two Caption: Rear View

02-15-2024

Clear Photo Two

## IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 **BUILDING PHOTOGRAPHS**

**Continuation Page** 

		Unit, Suite, and/or Bldg. No.) or P.O. Route	and Box No.:	FOR INSURANCE COMPANY USE
166	Champlain Drive			Policy Number:
City:	Pooler	State: Georgia ZIP Code:	31322	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



**Photo Three** 

Photo Three Caption: Left View

02-15-2024

Clear Photo Three



Photo Four

Photo Four Caption: Right View

02-15-2024

Clear Photo Four

## AUDITIONAL BUILDING PHOTOGRAPHS

## **ELEVATION CERTIFICATE**

**Continuation Page** 

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 166 Champlain Drive	Policy Number:		
City Pooler	State Georgia	ZIP Code 31322	Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.




**Photo One Caption** 

VENT 02-15-2024



Photo Two Caption

VENT 02-15-2024





ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

**ESR-2074** 

Reissued 02/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS
SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

## **REPORT HOLDER:**

# SMART VENT PRODUCTS, INC.

## **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





**ESR-2074** 

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

## 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

#### 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

## 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

### **6.0 EVIDENCE SUBMITTED**

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

**TABLE 1—MODEL SIZES** 

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 Inch = 25.4 mm; 1 square foot =  $\text{m}^2$ 

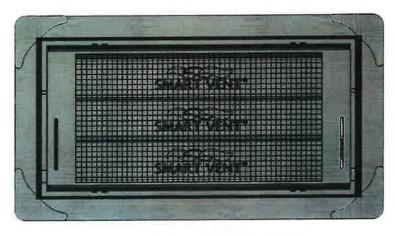


FIGURE 1-SMART VENT: MODEL 1540-510

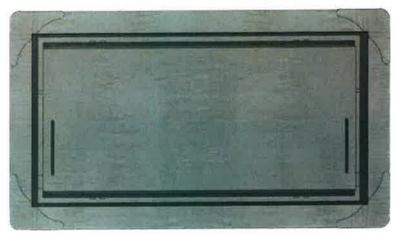


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

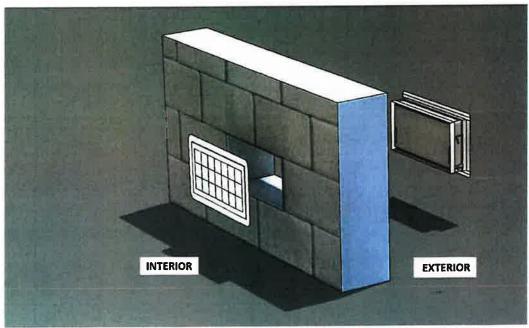


FIGURE 4—FLOOD VENT SEALING KIT



# **ESR-2074 CBC and CRC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

#### Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

## 2.0 CONCLUSIONS

#### 2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

#### 2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.





# **ESR-2074 FBC Supplement**

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

**REPORT HOLDER:** 

SMART VENT PRODUCTS, INC.

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

## 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

## Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.

