OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Tippins Homes	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 161 Wood Haven Lane	Company NAIC Number:
City: Pooler State: GA	ZIP Code: 31322
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Numbers 435 Westbrook Phase 7B Tax Parcel # 51009G14006	mber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential	
A5. Latitude/Longitude: Lat. 32.069163° Long81.295481° Horizontal Datum:	NAD 1927 ⊠ NAD 1983 □ WGS 84
A6. Attach at least two and when possible four clear photographs (one for each side) of the building	g (see Form pages 7 and 8).
A7. Building Diagram Number:1B	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): N/A sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	P ☐ Yes ☐ No N/A
 c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings: N/A Engineered flood openings: N/A 	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c:N/A sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ons): N/A sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions):N/Asq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 953.00 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage'	? ⊠Yes ☐ No ☐ N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjudent Non-engineered flood openings:	acent grade:
d) Total net open area of non-engineered flood openings in A9.c: 9.00 sq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons):1,000.00 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions):N/Asq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFO	RMATION
B1.a. NFIP Community Name: City of Pooler B1.b. NFIP Community Ide	entification Number: 130261
B2. County Name: Chatham B3. State: GA B4. Map/Panel No.:	13051C0108 B5. Suffix: G
B6. FIRM Index Date: 08/16/2018 B7. FIRM Panel Effective/Revised Date: 08/16/20	018
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use	Base Flood Depth): 14.0
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: ☐ FIS ☐ FIRM ☐ Community Determined ☐ Other:	
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other	r/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prof Designation Date:	tected Area (OPA)?
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Rou 161 Wood Haven Lane	ite and Box No.:	FOR INSURANCE COMPANY US				
City: Pooler State: GA ZIP Code: 31322			Policy Number: Company NAIC Number:			
SECTION C - BUILDING ELEVATION INFOR	MATION (SURVEY	REQU	IRED			
C1. Building elevations are based on: Construction Drawings* Bu *A new Elevation Certificate will be required when construction of the buil	ilding Under Construction	tion* 🔀	Fini	shed Co	nstruction	
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (A99. Complete Items C2.a–h below according to the Building Diagram sp. Benchmark Utilized: eGPS	with BFE), AR, AR/A, pecified in Item A7. In latum: NAVD88	AR/AE, Puerto f	AR/A Rico oi	1–A30, <i>A</i> nly, ente	AR/AH, AR/AO, r meters.	
Indicate elevation datum used for the elevations in items a) through h) below. NGVD 1929 NAVD 1988 Other:	atum. 1440 DOG					
Datum used for building elevations must be the same as that used for the BFB If Yes, describe the source of the conversion factor in the Section D Comment	E. Conversion factor us	sed?		71	No	
a) Top of bottom floor (including basement, crawlspace, or enclosure floor	or):	16.30		ck the mo	easurement use	
b) Top of the next higher floor (see Instructions):	-	N/A		eet \square	meters	
c) Bottom of the lowest horizontal structural member (see Instructions):	\ -	N/A		eet 🗍	meters	
d) Attached garage (top of slab):		14.60	Ξ.	eet \square	meters	
 e) Lowest elevation of Machinery and Equipment (M&E) servicing the bu (describe type of M&E and location in Section D Comments area): 	ilding	16.30		eet 🖂	meters	
f) Lowest Adjacent Grade (LAG) next to building: Natural Finis		14.00		eet 🗍	meters	
g) Highest Adjacent Grade (HAG) next to building: Natural X Finis		14.50	_	eet 🖂	meters	
 h) Finished LAG at lowest elevation of attached deck or stairs, including support: 		N/A		eet 🗍	meters	
SECTION D - SURVEYOR, ENGINEER, OR	ARCHITECT CERT		ION			
This certification is to be signed and sealed by a land surveyor, engineer, or an information. I certify that the information on this Certificate represents my best false statement may be punishable by fine or imprisonment under 18 U.S. Coo	rchitect authorized by efforts to interpret the	state la	w to co	ertify elev	vation orstand that any	
Were latitude and longitude in Section A provided by a licensed land surveyor	? Xes No					
Check here if attachments and describe in the Comments area.						
Certifier's Name: James Craig Brewer License Number	GA 3022 / SC 254	41			_	
Title: Professional Land Surveyor			6	ONG	KI .	
Company Name: Brewer Land Surveying			18	,	(s)	
Address: PO Box 441		(*		No. 302 OFESSIO		
	Code: 31322	1/5	2/2		18/2	
Digitally signed by J Craig Brewer Digitally signed by J Craig Br	Date: 09/12/2024		Co.	RAIG		
Telephone: (912) 856-2205 Ext.: Email: info@brewersurv	ey.com			Place Se	al Here	
Copy all pages of this Elevation Certificate and all attachments for (1) community	official, (2) insurance a	gent/co	mpany	, and (3)	building owner.	
Comments (including source of conversion factor in C2; type of equipment and						
Item C2e is the lowest HVAC equipment. The vents in A9 are "smart vent" Model 1540-570. Please see attache						

Building Street Address (including	Apt., Unit, Suite, and/or Bldg	j. No.) or P.O. Route a	and Box No.:	FOR INSURANCE COMPANY	USE
161 Wood Haven Lane	Chahai	GA ZID Code:	21222	Policy Number:	_
City: Pooler	State:	GA ZIP Code:	31322	Company NAIC Number:	
SECTION E	- BUILDING MEASURI FOR ZONE AO, ZONE				
For Zones AO, AR/AO, and A (wintended to support a Letter of Menter meters.	rithout BFE), complete Items lap Change request, comple	s E1–E5. For Items E ete Sections A, B, and	1–E4, use natured C. Check the r	ral grade, if available. If the Certificat measurement used. In Puerto Rico o	te is nly,
Building measurements are base *A new Elevation Certificate will	_	awings*		ction*	
E1. Provide measurements (C.2 measurement is above or be			ng and check th	e appropriate boxes to show whethe	r the
a) Top of bottom floor (inclu crawlspace, or enclosure			feet mete	ers 🔲 above or 🔲 below the F	IAG.
Top of bottom floor (inclu crawlspace, or enclosure			feet 🗌 mete	ers 🔲 above or 🔲 below the L	AG.
E2. For Building Diagrams 6–9 next higher floor (C2.b in ap Building Diagram) of the bui	plicable	ngs provided in Section	on A Items 8 and	d/or 9 (see pages 1–2 of Instructions ers above or below the H	
E3. Attached garage (top of slat	o) is:		feet mete	ers above or below the H	IAG.
E4. Top of platform of machiner servicing the building is:	y and/or equipment		feet mete	ers above or below the F	IAG.
E5. Zone AO only: If no flood de floodplain management ordi		the top of the bottom Unknown 1	floor elevated in he local official	n accordance with the community's must certify this information in Section	on G.
SECTION F - PROF	PERTY OWNER (OR OW	NER'S AUTHORIZ	ED REPRESI	ENTATIVE) CERTIFICATION	
The property owner or owner's a sign here. The statements in Sec	uthorized representative wh	o completes Sections	s A, B, and E for	r Zone A (without BFE) or Zone AO	must
Check here if attachments ar					
Property Owner or Owner's Auth	orized Representative Name	e:			
Address:					
City:	A A AND THE	-0.42%	State:	ZIP Code:	
			PT the pris		
Signature:	<u> </u>	Date):;	48° 1 27.8° 411	
Telephone:	Ext.: Email:_		7 B 32	PHS data 2 1	
Comments:	31 a)			21.163	
	1. 12			Lat	
	rest in		1	3 Mary 1	
2					

Building Street Address (including Apt., 161 Wood Haven Lane	Unit, Suite, and/or Bldg. No.) o	or P.O. Route and Box No.:	FOR INS	URANCE COMPANY USE
City: Pooler	State: GA	ZIP Code: 31322	Policy Nur Company	nber:
SECTION G - COMMUNITY	INFORMATION (RECOM	MENDED FOR COMMUN	ITY OFFICIA	AL COMPLETION)
The local official who is authorized by Section A, B, C, E, G, or H of this Elev	law or ordinance to administe ation Certificate. Complete th	er the community's floodplain n ne applicable item(s) and sign l	nanagement o below when:	rdinance can complete
G1. The information in Section engineer, or architect who elevation data in the Comm	is authorized by state law to o	mentation that has been signe pertify elevation information. (In	ed and sealed ndicate the so	by a licensed surveyor, urce and date of the
G2.a. A local official completed S E5 is completed for a build	ection E for a building located ing located in Zone AO.	d in Zone A (without a BFE), Z	one AO, or Zo	one AR/AO, or when item
G2.b. A local official completed S	ection H for insurance purpos	ses.		
G3.	ection G, the local official des	scribes specific corrections to	the information	n in Sections A, B, E and H.
		or community floodplain manag		
G5. Permit Number:		ermit Issued:	1,000	
G7. Date Certificate of Compliance	Occupancy Issued:			
G8. This permit has been issued fo	r: New Construction	Substantial Improvement		
G9.a. Elevation of as-built lowest floo building:	r (including basement) of the	☐ feet	☐ meters	Datum:
G9.b. Elevation of bottom of as-built i member:	owest horizontal structural		☐ meters	Datum:
G10.a. BFE (or depth in Zone AO) of fl	ooding at the building site:	feet	meters	Datum:
G10.b. Community's minimum elevation requirement for the lowest floor	n (or depth in Zone AO) or lowest horizontal structura	al		
member:		feet	meters	Datum:
G11. Variance issued? Yes	No If yes, attach docume	entation and describe in the Co	omments area	
The local official who provides informat correct to the best of my knowledge. If	ion in Section G must sign he applicable, I have also provic	ere. I have completed the infor led specific corrections in the (mation in Sec Comments are	tion G and certify that it is ea of this section.
Local Official's Name:	Johnson, ALCP, CF	m Title: Disector	of Plann	in & Our low went
NFIP Community Name:	City of Pooler		0	A Bottonform
Telephone: 912-748-7361	Ext.: 306 Email: Niol	home pooler-ga.	90/	
Address: 100 Sw th				
City: Pooler	0	State: 6	A ZIP C	ode: 31322
Signature:	Orhum	Date: 7 29	} =	
Comments (including type of equipment Sections A, B, D, E, or H):	t and location, per C2.e; desc		nd corrections	to specific information in
· · · · · · · · · · · · · · · · · · ·				

Building Street Address (including Ap 161 Wood Haven Lane	ot., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: Pooler	State: GA	ZIP Code: <u>31322</u>	Policy Number: Company NAIC Number:
		OR HEIGHT INFORMATION OR INSURANCE PURPOSI	
to determine the building's first floo	height for insurance purposes hof a meter in Puerto Rico). ReBuilding Diagrams (at the en	s. Sections A, B, and I must also reference the Foundation Type and of Section I Instructions) to	
	., 1B, 3, and 5–9. Top of botton		meters above the LAG
 b) For Building Diagrams 2A higher floor (i.e., the floor abovenclosure floor) is: 			meters above the LAG
H2. Is all Machinery and Equipment H2 arrow (shown in the Foundard Yes ☐ No	nt servicing the building (as liste ation Type Diagrams at end of	ed in Item H2 instructions) eleve Section H instructions) for the a	ated to or above the floor indicated by the appropriate Building Diagram?
SECTION I - PROPER	TY OWNER (OR OWNER'	S AUTHORIZED REPRESE	NTATIVE) CERTIFICATION
The property owner or owner's auth A, B; and H are correct to the best indicate in Item G2.b and sign Sect	of my knowledge. Note: If the lo	npletes Sections A, B, and H mo ocal floodplain management off	ust sign here. <i>The statements in Sections</i> ficial completed Section H, they should
Check here if attachments are p	rovided (including required pho	otos) and describe each attachr	ment in the Comments area.
Property Owner or Owner's Authori	zed Representative Name:		
Property Owner or Owner's Authori	zed Representative Name:	01.1	
Property Owner or Owner's Authori	zed Representative Name:	01.1	
Property Owner or Owner's Authori	zed Representative Name:	01.1	
Property Owner or Owner's Authori Address:	zed Representative Name:	State:	
Property Owner or Owner's Authori Address: City: Signature:	zed Representative Name:	State:	

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., L 161 Wood Haven Lane	Init, Suite, and/or Blo	dg. No.) d	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: Pooler	State:	GA	ZIP Code: <u>31322</u>	Policy Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption:

Front View - 8/27/24

Clear Photo One



Photo Two

Photo Two Caption:

Rear View - 8/27/24

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt	., Unit, Suite, and/or Blo	dg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
161 Wood Haven Lane				Policy Number:
City: Pooler	State:	GA	ZIP Code: 31322	Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption:

Left Side View - 8/27/24

Clear Photo Three



Photo Four

Photo Four Caption:

Right Side View - 8/27/24

Clear Photo Four



ICC-ES Evaluation Report

ESR-2074

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:


The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 — 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square





feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200	
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200	
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200	
SmartVENT® Stacker	1540-511	16" X 16"	400	
FloodVent® Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m2

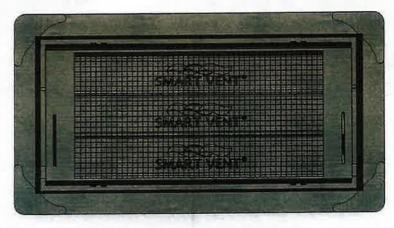


FIGURE 1-SMART VENT: MODEL 1540-510

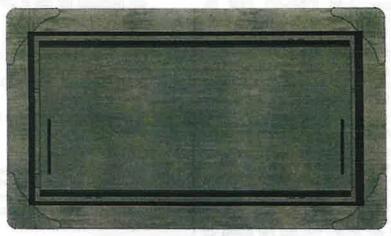


FIGURE 2-SMART VENT MODEL 1540-520

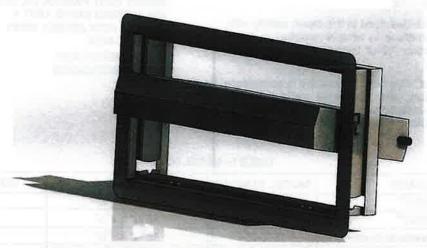


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

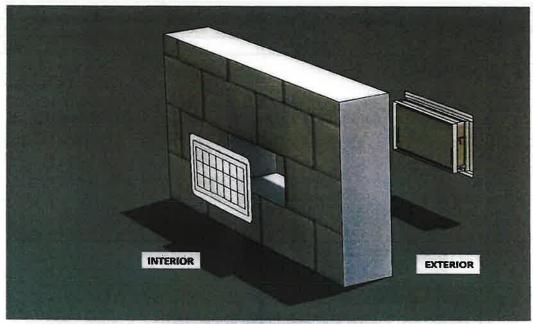


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 *International Residential Code®* (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.



ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.

