MAYOR
Karen L. Williams
CITY MANAGER
Heath Lloyd
CITY ATTORNEY
Craig Call



CITY COUNCIL
Wesley Bashlor
Michael Carpenter
Aaron C. Higgins
Thomas Hutcherson
M. Shannon Valim
John M. Wilcher

## **Memo of Review for Correctness and Completion**

The attached FEMA Elevation Certificate has been reviewed by this office.

The items noted below are not correct on the attached form and should read as entered on this page.

- Building Address must be entered
- You must clearly show what corrections are made
- Signature and date must be on form.

	SECTION A - PROPERTY INFORMATION
A1.	Building Owner's Name:
A2.	Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:
148	Champlain Drive
City	: Pooler State: GA ZIP Code: 31322
A3.	Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number:
A4.	Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.):
A5.	Latitude/Longitude: Lat. 32.147409 Long81.274464 Horizontal Datum: NAD 1927 NAD 1983 WGS 84
	Attach at least two and when possible four clear photographs (one for each side) of the building (see Form pages 7 and 8).
A7.	Building Diagram Number:
A8.	For a building with a crawlspace or enclosure(s):
	a) Square footage of crawlspace or enclosure(s):sq. ft.
	b) Is there at least one permanent flood opening on two different sides of each enclosed area?   Yes No NA
	c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade:  Non-engineered flood openings: Engineered flood openings:
	d) Total net open area of non-engineered flood openings in A8.c:sq. in.
	e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instructions):sq. ft.
	f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): sq. ft.
A9.	For a building with an attached garage:
	a) Square footage of attached garage:sq. ft.
	b) Is there at least one permanent flood opening on two different sides of the attached garage?   Yes No N/A
	c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade:  Non-engineered flood openings: Engineered flood openings:
	d) Total net open area of non-engineered flood openings in A9.c:sq. in.
	e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instructions):sq. ft.
2	f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): sq. ft.

SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION						
B1.a. NFIP Community Name:		B1.b. NFIP Community Identification Number:				
B2. County Name:	B3. State:	B4. Map/Panel No.:	B5. Suffix:			
B6. FIRM Index Date:	B7. FIRM Panel Effec	tive/Revised Date:				
B8. Flood Zone(s):	B9. Base Flood Elevat	ion(s) (BFE) (Zone AO, use Base Flood	Depth):			
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:  FIS FIRM Community Determined Other:						
B11. Indicate elevation datum used for BFE in	Item B9: NGVD 192	29 NAVD 1988 Other/Source:				
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No Designation Date: CBRS OPA						
B13. Is the building located seaward of the Lin	B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? Yes No					
-						
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)						
C1. Building elevations are based on:  Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.						
Local Official's Name: Nicole Johnson, AICP, C	=M	Title: Director of Planning & Develo				
Community Name: City of Pooler		Telephone: 912-748-7261, ext 306				
Signature Web Cohnsu	20	Date: 10/2/2024				
Comments:						

A5 has been corrected to be in the correct format and correct numbers.

## U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

### **ELEVATION CERTIFICATE**

### **IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19**

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Landmark 24 Homes	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 148 Champlain Drive	Company NAIC Number:
City: Pooler State: Georgia	ZIP Code: 31322
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Num Lot 1004, Forest Lakes, Phase 10, 8th G.M. District, City of Pooler, Chatham County	
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential	
A5. Latitude/Longitude: Lat. 32.14659 Long81.27548 Horizontal Datum: N	AD 1927 X NAD 1983 WGS 84
A6. Attach at least two and when possible four clear photographs (one for each side) of the building	
A7. Building Diagram Number: _ <sup>1B</sup>	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s): N/A sq. ft.	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	☐ Yes ☐ No 🔯 N/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot a Non-engineered flood openings: N/A Engineered flood openings: N/A	above adjacent grade:
d) Total net open area of non-engineered flood openings in A8.c: N/A sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ns): N/A sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: 455 sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage?	∑Yes ☐ No ☐ N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adja Non-engineered flood openings: 0 Engineered flood openings: 3	cent grade:
d) Total net open area of non-engineered flood openings in A9.c: 0 sq. in.	4 a
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ns): 660 sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): N/A sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	MATION
B1.a. NFIP Community Name: City of Pooler B1.b. NFIP Community Ider	ntification Number 130261
P2 County Name: Chatham County P3 State: GA R4 Man/Panel No. 1	13051C0019 B5 Suffix: H
B6. FIRM Index Date: 08-16-2018 B7. FIRM Panel Effective/Revised Date: 07-07-2	2014
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use B	ase Flood Depth): 20.0'
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9:  FIS X FIRM Community Determined Other:	
B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other/	Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prote Designation Date: CBRS OPA	ected Area (OPA)?
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? Yes 🔀	No

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P <sub>2</sub> O <sub>2</sub> Route and Bo	x No.	FOR INSURANCE COMPANY USE						
City: Pooler State: Georgia ZIP Code: 3132.	2	Policy Number:  Company NAIC Number:						
SECTION C - BUILDING ELEVATION INFORMATION	(SURVEY R	EQUIRED)						
C1. Building elevations are based on: Construction Drawings* Building Und *A new Elevation Certificate will be required when construction of the building is concern.  C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE)	mplete , AR, AR/A, AF							
A99. Complete Items C2,a-h below according to the Building Diagram specified in Item A7. In Puerto Rico only, enter meters.  Benchmark Utilized: Local Vertical Datum: NAVD 88								
Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ★ NAVD 1988 ☐ Other:								
Datum used for building elevations must be the same as that used for the BFE. Convers If Yes, describe the source of the conversion factor in the Section D Comments area.	sion factor used	d? ☐ Yes ☒ No  Check the measurement used:						
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	22.2	▼ feet						
b) Top of the next higher floor (see Instructions):	32.7	x feet meters						
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A	feet meters						
d) Attached garage (top of slab):	20 - 6	feet meters						
<ul> <li>e) Lowest elevation of Machinery and Equipment (M&amp;E) servicing the building (describe type of M&amp;E and location in Section D Comments area);</li> </ul>	22.2	🔀 feet 📋 meters						
f) Lowest Adjacent Grade (LAG) next to building:   Natural   Finished	19.9	🕱 feet 🗌 meters						
g) Highest Adjacent Grade (HAG) next to building:   Natural   Finished	20.1	feet meters						
<ul> <li>Finished LAG at lowest elevation of attached deck or stairs, including structural support;</li> </ul>	N/A	feet meters						
SECTION D - SURVEYOR, ENGINEER, OR ARCHITE	CT CERTIF	CATION						
This certification is to be signed and sealed by a land surveyor, engineer, or architect au information. I certify that the information on this Certificate represents my best efforts to false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section	interpret the da							
Were latitude and longitude in Section A provided by a licensed land surveyor? X Yes	s 🗌 No							
Theck here if attachments and describe in the Comments area.								
Certifier's Name: Don E. Taylor License Number: 3417								
Title: Professional Land Surveyor		GEORG						
Company Name: Coleman Company, Inc.		AEG STEP T						
Address: 1480 Chatham Parkway, Suite 100		To the same of						
City: Savannaii State: GA ZIP Code: 3		The same of the sa						
Signature: Date: 05/ Telephone: 912-200-1041 Fix Fmail: DTAYLOR@CCI-SAV. COM		Place Sea Here						
Total India.								
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2)								
Comments (including source of conversion factor in C2; type of equipment and location pass (Plat Book 53, Page 797).  A9: Garage vented by (3) three engineered vents. Flood Flaps, LLC. Model# FFNF05. See attached certification.  B9: A 1'(one foot) free board is required by the City of Pooler Flood Damage Prevention Ordinance on all new concepts and the concepts of the Cartesian	struction.							

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE	
148 Champlain Drive	Policy Number:	
City: Pooler State: Georgia ZIP Code: 31322	Company NAIC Number:	
SECTION E – BUILDING MEASUREMENT INFORMATION (SURVEY FOR ZONE AO, ZONE AR/AO, AND ZONE A (WITHOUT	NOT REQUIRED) BFE)	
For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, use natural intended to support a Letter of Map Change request, complete Sections A, B, and C. Check the me enter meters.	grade, if available. If the Certificate is asurement used. In Puerto Rico only,	
Building measurements are based on: Construction Drawings* Building Under Construction* A new Elevation Certificate will be required when construction of the building is complete.	on* Finished Construction	
E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and check the a measurement is above or below the natural HAG and the LAG.	appropriate boxes to show whether the	
a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or below the HAG.	
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:	above or below the LAG.	
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/o next higher floor (C2.b in applicable Building Diagram) of the building is:	r 9 (see pages 1–2 of Instructions), the above or below the HAG.	
E3. Attached garage (top of slab) is:	above or below the HAG.	
E4. Top of platform of machinery and/or equipment servicing the building is:	above or below the HAG.	
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in a floodplain management ordinance?   Yes No Unknown The local official management ordinance?	ccordance with the community's ust certify this information in Section G.	
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED REPRESEN	ITATIVE) CERTIFICATION	
The property owner or owner's authorized representative who completes Sections A, B, and E for Z sign here. The statements in Sections A, B, and E are correct to the best of my knowledge	one A (without BFE) or Zone AO must	
Check here if attachments and describe in the Comments area.		
Property Owner or Owner's Authorized Representative Name:		
Address:		
City: State:	ZIP Code:	
Signature: Date:	<del></del>	
Telephone: Ext.: Email:		
Comments:		

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.;	FOR INSURANCE COMPANY USE
148 Champlain Drive	Policy Number:
City: Pooler State: Georgia ZIP Code: 31322	Company NAIC Number:
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR COMMUN	ITY OFFICIAL COMPLETION)
The local official who is authorized by law or ordinance to administer the community's floodplain mesocition A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) and sign to	nanagement ordinance can complete below when:
G1. The information in Section C was taken from other documentation that has been signe engineer, or architect who is authorized by state law to certify elevation information. (In elevation data in the Comments area below.)	ed and sealed by a licensed surveyor, andicate the source and date of the
G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Z E5 is completed for a building located in Zone AO.	one AO, or Zone AR/AO, or when item
G2.b.   A local official completed Section H for insurance purposes.	
G3.	the information in Sections A, B, E and H.
G4.	gement purposes
G5. Permit Number: G6. Date Permit Issued:	
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: New Construction  Substantial Improvement	
G9.a. Elevation of as-built lowest floor (including basement) of the building:	meters Datum:
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	meters Datum
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	meters Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	meters Datum
G11 Variance issued? Yes X No If yes, attach documentation and describe in the Co	_
The local official who provides information in Section G must sign here. I have completed the information in Section C must sign here.	
correct to the best of my knowledge. If applicable, I have also provided specific corrections in the	Comments area of this section.
Local Official's Name: Kim Diev, CPM Title: 3/Ming	administrator
NFIP Community Name: uty of Pooler	
Telephone: 912. 748. 7261 Ext.: 105 Email: Kdyere pooler.	ga.gw
Address: (00 SW Hwy 80	9 0
City: POOLOG 2 State: Q	9 ZIP Code: 3/322
Wi Duph 5/2	3/24
Signature: Date: Date:	104
Comments (including type of equipment and location, per C2.e; description of any attachments; a Sections A, B, D, E, or H):	nd corrections to specific information in

# ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Building Street Address (in		e, and/or Bldg. No.) or F	O. Route and Box No.:	FOR INSURANCE COMPANY USE
148 Champlain Dr.				Policy Number:
City: Pooler		State: Georg	ZIP Code: 31322	Company NAIC Number:
SEC			HEIGHT INFORMATIO	
to determine the building' nearest tenth of a foot (ne	s first floor height for in earest tenth of a meter	surance purposes. Se in Puerto Rico). <b>Refer</b>	ctions A, B, and I must all ence the Foundation Ty	may complete Section H for all flood zones iso be completed. Enter heights to the upe Diagrams (at the end of Section H) to complete this section.
H1. Provide the height of	the top of the floor (as	indicated in Foundation	on Type Diagrams) above	e the Lowest Adjacent Grade (LAG):
floor (include above-	grams 1A, 1B, 3, and grade floors only for bu es or enclosure floors)	ildings with	feet	☐ meters ☐ above the LAG
	grams 2A, 2B, 4, and floor above basement,		feet	meters above the LAG
H2. Is <b>all</b> Machinery and H2 arrow (shown in the Yes No	Equipment servicing the Foundation Type Di	ne building (as listed in iagrams at end of Sect	Item H2 instructions) ele ion H instructions) for the	evated to or above the floor indicated by the appropriate Building Diagram?
SECTION I -	PROPERTY OWNE	R (OR OWNER'S A	UTHORIZED REPRES	SENTATIVE) CERTIFICATION
indicate in Item G2.b and  Check here if attachm	sign Section G. ents are provided (incl	uding required photos)	and describe each attac	official completed Section H, they should hment in the Comments area.
Address:				
City:			State:	ZIP Code:
Signature:			Date:	
Telephone:	Ext.:		Date.	
Comments:				
				70
		7		
	4			

#### IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 **BUILDING PHOTOGRAPHS**

See Instructions for Item A6.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 148 Champlain Drive

City: Pooler

State: Georgia ZIP Code: 31322

FOR INSURANCE COMPANY USE

Policy Number:

Company NAIC Number: \_\_

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: Front View

05/22/2024

Clear Photo One



Photo Two

Photo Two Caption: Rear View

05/22/2024

Clear Photo Two

## IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

## **BUILDING PHOTOGRAPHS**

Continuation Page

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.; 148 Champlain Drive

City: Pooler

State: Georgia ZIP Code: 31322

FOR INSURANCE COMPANY USE

Policy Number:

Company NAIC Number:

Insert the third and fourth photographs below, Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: Left View

05/22/2024

Clear Photo Three



Photo Four

Photo Four Caption: Right View

05/22/2024

Clear Photo Four

#### ADDITIONAL **BUILDING PHOTOGRAPHS**

### **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces,	copy the corresponding information	from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including 148 Champlain Drive	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Pooler	Georgia	31322	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One Caption

VENTS 05/22/2024



Photo Two Caption

VENTS 05/22/2024



## **ICC-ES Evaluation Report**

#### **ESR-3560**

Reissued September 2023

This report also contains:

- CBC Supplement

- FBC Supplement

Subject to renewal September 2024

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2023 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 08 00 00 - OPENINGS

Section: 08 95 43— Vents/Foundation Flood

**Vents** 

REPORT HOLDER: FLOOD FLAPS®, LLC

**EVALUATION SUBJECT:** 

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08;

FFWF08; FFNF08;



#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- ■2021, 2018, 2015, 2012 and 2009 International Building Code® (IBC)
- ■2021, 2018, 2015, 2012 and 2009 International Residential Code® (IRC)

#### Properties evaluated:

- Physical operation
- ■Water flow
- Weathering

#### **2.0 USES**

Flood Flaps® automatic flood vents are used to provide for the equalization of hydrostatic flood forces on exterior walls. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

Flood Flaps® automatic flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction. The FVs are available in two series as described in Section 3.3.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open by water pressure, allowing water and debris to flow through the FV in either direction. See <u>Figure 1</u> for an illustration of the Flood Flaps<sup>®</sup> automatic FV.

#### 3.2 Engineered Opening:

The Flood Flaps® automatic FVs comply with the design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)] for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered



opening requirement of ASCE/SEI 24, Flood Flaps® automatic FVs must be installed in accordance with Section 4.0.

#### 3.3 Flood Vent Series Models:

Flood Flaps® automatic FVs are available in two series with multiple models and sizes as described in Table 1. The sealed series models, designated FFWF, include two rubber flaps for the prevention of air flow. The multi-purpose series, designated FFNF, omits the rubber flaps.

#### 3.4 Natural Ventilation:

Flood Flaps® automatic FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with ½ inch by ½-inch (6 mm by 6 mm) openings and provide 37 square inches (0.02 m²) of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® automatic FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

#### 4.0 DESIGN AND INSTALLATION

Flood Flaps® automatic FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® automatic FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/SEI 24-05 (2012 and 2009 IBC and IRC)], the Flood Flaps® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 220 squarefeet (20 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of12 inches (305 mm) above grade.

#### 5.0 CONDITIONS OF USE:

The Flood Flaps® automatic flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Flood Flaps® automatic FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Flood Flaps® automatic FVs must not be used in place of "breakaway walls" in coastal high hazard areas but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised April 2021).

#### 7.0 IDENTIFICATION

- 7.1 The ICC-ES mark of conformity, electronic labeling, or the evaluation report number (ICC-ES ESR-3560) along with the name, registered trademark, or registered logo of the report holder (Flood Flaps®) must be included in the product label.
- 7.2 In addition, the Flood Flaps® models described in this report are identified by a label bearing the model number.
- 7.3 The report holder's contact information is the following:

FLOOD FLAPS®, LLC
POST OFFICE BOX 1003
ISLE OF PALMS, SOUTH CAROLINA 29451
(843) 881-0190
www.floodflaps.com
info@floodflaps.com

## TABLE 1—FLOOD FLAP AUTOMATIC FLOOD VENT MODEL SIZES

MODEL NUMBER	MODEL DESIGNATION	ROUGH OPENING (Width X Height) (inches)	VENT SIZE (W X H X D) (inches)	ENCLOSED AREA COVERAGE <sup>2</sup> (ft <sup>2</sup> )	NET FREE AREA OPENING <sup>1</sup> (in <sup>2</sup> )
FFWF12	Sealed Series	16 x 8	15 <sup>6</sup> / <sub>8</sub> X 7 <sup>3</sup> / <sub>4</sub> X 12	220	NA
FFNF12	Multi-Purpose	16 x 8	15 <sup>5</sup> / <sub>8</sub> X 7 <sup>3</sup> / <sub>4</sub> X 12	220	37
FFWF08	Sealed Series	16 x 8	15 <sup>5</sup> / <sub>8</sub> x 7 <sup>3</sup> / <sub>4</sub> x 8	220	NA
FFNF08	Multi-Purpose	16 x 8	15 <sup>5</sup> / <sub>8</sub> x 7 <sup>3</sup> / <sub>4</sub> x 8	220	37
FFWF05	Sealed Series	16 x 8	15 <sup>5</sup> / <sub>8</sub> x 7 <sup>3</sup> / <sub>4</sub> x 5	220	NA
FFNF05	Multi-Purpose	16 x 8	15 <sup>5</sup> / <sub>8</sub> x 7 <sup>3</sup> / <sub>4</sub> x 5	220	37

For SI: 1 inch = 25:4 mm; 1  $f^2$  = 0.093  $m^2$ 

<sup>&</sup>lt;sup>1</sup>For under-floor ventilation only.
<sup>2</sup>The enclosed coverage area In square feet for each model is equivalent to the performance of the same number of square inches of non-engineered openings.

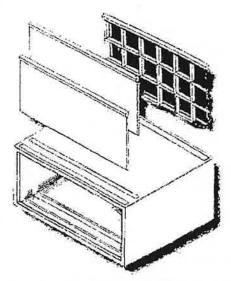


FIGURE 1—FLOOD FLAPS® AUTOMATIC FLOOD VENT

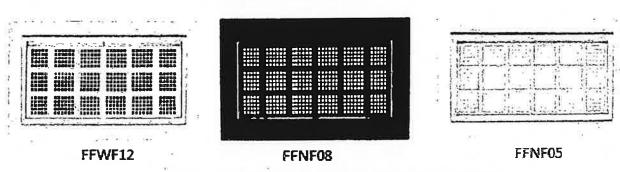


FIGURE 2—FLOOD FLAPS® AUTOMATIC FLOOD VENT SERIES MODELS

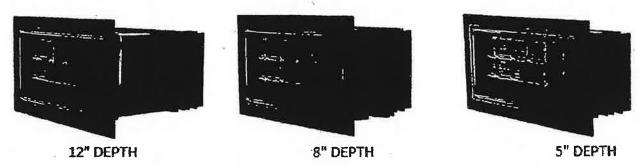


FIGURE 3—FLOOD FLAPS® AUTOMATIC FLOOD VENTS MULTIPLE DEPTH OFFERINGS



## **ICC-ES Evaluation Report**

## **ESR-3560 CBC and CRC Supplement**

Reissued September 2023

This report is subject to renewal September 2024.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 08 00 00—OPENINGS** 

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

**EVALUATION SUBJECT:** 

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, has also been evaluated for compliance with the code(s) noted below.

#### Applicable code editions:

- 2022 California Bullding Code (CBC)
- 2022 California Residential Code (CRC)

For evaluation of applicable Chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

#### 2.0 CONCLUSIONS

#### 2.1 CBC:

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with CBC Chapter 12, provided the design and installation are in accordance with the 2021 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

#### 2.2 CRC

The Flood Flaps® automatic flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with 2021 CRC, provided the design and installation are in accordance with the 2021 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued September 2023.





## **ICC-ES Evaluation Report**

## **ESR-3560 FBC Supplement**

Reissued September 2023

This report is subject to renewal September 2024.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC

**EVALUATION SUBJECT:** 

FLOOD FLAPS® AUTOMATIC FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

#### 1.0 REPORT PURPOSE AND SCOPE

#### Purpose:

The purpose of this evaluation report supplement is to indicate that Flood Flaps® automatic flood vents, described in ICC-ES evaluation report ESR-3560, have also been evaluated for compliance with the codes noted below.

#### Applicable code editions:

- 2023 and 2020 Florida Building Code—Building
- 2023 and 2020 Florida Building Code—Residential

#### 2.0 CONCLUSIONS

The Flood Flaps® flood vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-3560, comply with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design requirements are determined in accordance with the Florida Building Code—Building or the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-3530 for the 2021 and 2018 International Building Code® meet the requirements of the Florida Building Code—Building or the Florida Building Code—Residential, as applicable.

Use of the Flood Flaps flood vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality-assurance program is audited by a quality-assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued September 2023.

